



DS SERIES

DS322LR4-1

32" 2,500 nits Professional High Brightness
Digital Signage Display



**SUNLIGHT
VIEWABLE IMAGE**




**24 / 7
OPERATION**



**FULL HD
RESOLUTION**



**THERMAL
MANAGEMENT**



**TRUECOLOR™
CALIBRATED**

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.





DynaScan

SPECIFICATION

MODEL	DS322LR4-1	
PANEL	LCD Panel Size	31.55 inches LCD
	Native Resolution	1920 x 1080
	Backlight	LED
	Default Color Temperature	D65 (6500 K)
	Brightness	2500 nits
	Color Depth	8 bits
	Contrast Ratio	3000 : 1
	Response Time (Typ.)	12 ms
	Viewing Angle	178° / 178°
	Light Lifetime (Typ.)	100,000 hrs
	Blackening Defect Free	Up to 110°C (230°F)
	Panel Surface	AG Haze 1%, 3H
POWER	Power Supply	Internal
	Rated Voltage	100-240V ~ 50/60Hz
	Power On Mode (Typ./ Max)	120 W / 185 W
	Power Saving Mode	< 5 W
	Bezel Width (T/B/L/R)	18.0 / 18.0 / 13.1 / 13.1 mm
	Cabinet Color	Black
MECHANICAL SPECS	Monitor Dimension (LxHxD, w/o stand)	727.5 x 432.0 x 87.0 mm
	Monitor Weight	13.5 kg
	Orientation	Portrait / Landscape
	VESA Mounting	200 x 200 mm
	Carrying Handles	Yes
	Language	English
USER INTERFACE	Control Daisy Chain	RJ-45(RS-485)
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
INPUT	HDMI	x1 (1080p)
	DVI-D	x1
	USB	x1 (For Playback)
	VGA	x1
EXTERNAL CONTROL	RS-232	In x1
	RJ-45	x1 (RS-485)
ENVIRONMENT	Operating Temperature	0° C ~ 40° C
	Storage Temperature	-20° C ~ 60° C
	Humidity	10% ~ 80% RH Non-condensing
CERTIFICATION	CE / FCC / RoHS	

DIMENSIONS

Unit: mm [inch]

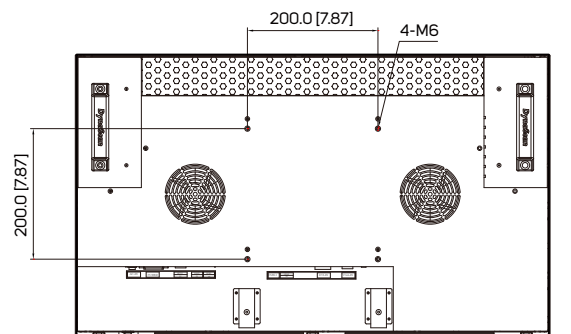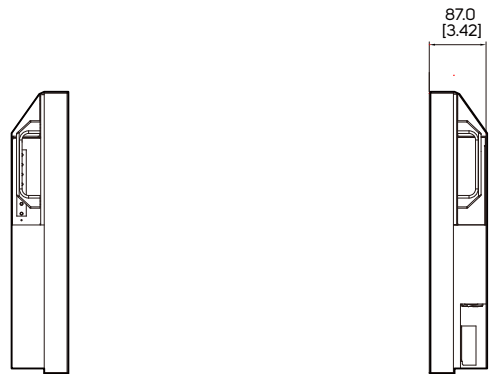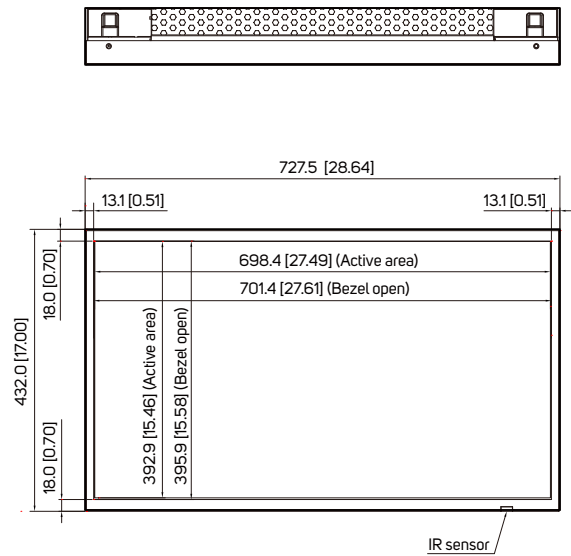

INTERFACE

